

La stazione di indexaggio o posizionamento è un accessorio atto a mantenere il pallet in posizione di lavoro.

L'elevata precisione è garantita da un sistema di cunei ad azionamento pneumatico per il centraggio.

L'indexaggio può avvenire sia verticale che orizzontale.

Il gruppo viene fornito completamente montato compreso di elementi di fissaggio.

Il pallet viene indexato verticalmente tramite cilindri dedicati.

Il carico massimo comprensivo di peso del pallet varia da 500 N a 3000 N in base alla tipologia di index.

The indexing or positioning unit is a device used to stop the pallet in its working position.


The high precision is guaranteed by a system of wedges with pneumatic drive for the centering positioning of the pallet.

The indexing operation can be both vertical and horizontal.

The unit is supplied fully assembled and complete with fasteners.

Pallet is vertical indexed through suitable cylinders.


Max load, pallet included, goes from 500 N up to 3000 N depending on the indexing unit type.

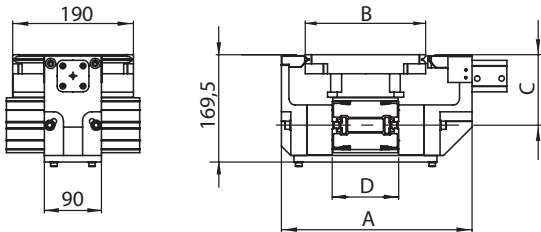

Index orizzontale per pallet con tomini idoneo per utilizzo con stop 83510020
Horizontal indexing unit for pallet with guidebase arranged for stop unit 83510020

	A (mm)	B (mm)	C (mm)	D (mm)
501000012 (FL 65)	260,5	150	104,5	65
501000017 (FL 85 c)	280,5	170	109,5	85
501000013 (FL 105)	300,5	190	111,5	105
501000014 (FL 85)	280,5	170	111,5	85
501000016 (EL 195)	390,5	250	111,5	195


NB. Ulteriori dimensioni a richiesta - *Other dimensions on request.*

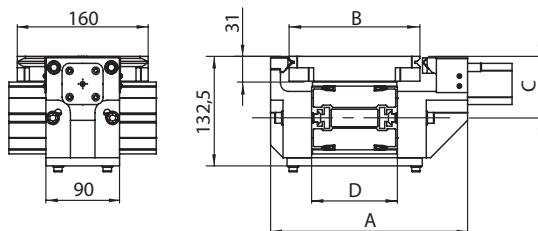

Index orizzontale per pallet senza tomini doneo per utilizzo con stop 85650901/2/3/4
Horizontal indexing unit for pallet without guide base arranged for stop unit 85650901/2/3/4

	A (mm)	B (mm)	C (mm)	D (mm)
501000011 (FL 65)	200,5	120	67,5	65
501000018 (FL 85 c)	220,5	140	72,5	85
501000009 (FL 105)	240,5	160	74,5	105
501000010 (FL 85)	220,5	140	74,5	85


NB. Ulteriori dimensioni a richiesta - *Other dimensions on request.*

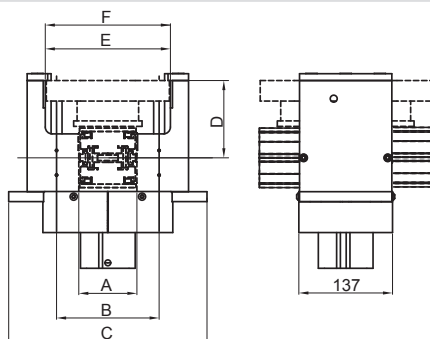

Index verticale (carichi fino a 50 Kg) per pallet con tomini
Vertical indexing unit (load up to 50 Kg) for pallet with guide base

	COD. / Item no. .	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
FL 65	501065011	65	130	270	106	160	162
FL 85 c	501085512	85	150	290	111	180	182
FL 105	501010509	105	170	310	113	200	202
FL 85	501085010	85	150	290	113	180	182


NB. Ulteriori dimensioni a richiesta - *Other dimensions on request.*

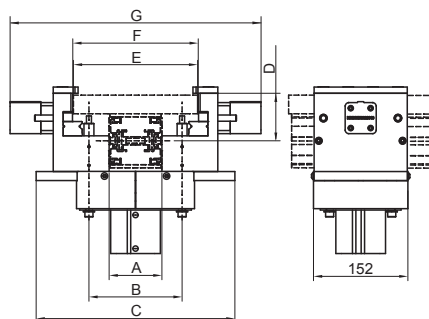

Index verticale (carichi fino a 300 Kg) per pallet senza tomini
Vertical indexing unit (load up to 300 Kg) for pallet without guide base

	COD. / Item no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
FL 65	501265011	65	130	300	69	180	182	385
FL 85 c	501285512	85	150	320	74	200	202	405
FL 105	501210509	105	170	340	76	220	222	425
FL 85	501285010	85	150	320	76	200	202	405


NB. Ulteriori dimensioni a richiesta - Other dimensions on request.

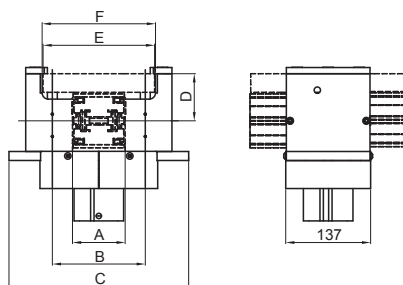

Index verticale (carichi fino a 50 Kg) per pallet senza tomini
Vertical indexing unit (load up to 50 Kg) for pallet without guide base

	COD. / Item no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
FL 65	501165011	65	130	270	69	160	162
FL 85 c	501185512	85	150	290	74	180	182
FL 105	501110509	105	170	310	76	200	202
FL 85	501185010	85	150	290	76	180	182


NB. Ulteriori dimensioni a richiesta - Other dimensions on request.

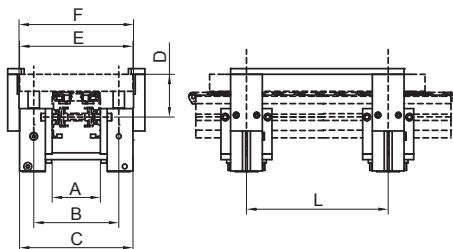

Index verticale modulare senza tomino con "L" variabile in funzione dell'applicazione
Modular vertical indexing unit without guide base, adjustable "L" according to the application

	COD. / Item no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
FL 65	5012065	65	130	180	69	180	182
FL 85 c - FL 85	5012085	85	150	200	76	200	202
FL 105	5012105	105	170	220	76	220	222

NB. Ulteriori dimensioni a richiesta - *Other dimensions on request.*

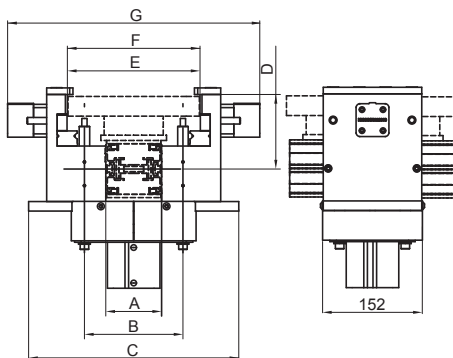

Index verticale (carichi fino a 300 Kg) per pallet con tomini - *Vertical indexing unit (load up to 300 Kg) for pallet with guide base*

	COD. / Item no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
FL 65	5121065	65	130	300	106	180	182	385
FL 85 c - FL 85	5121085	85	150	320	113	200	202	405
FL 105	5121105	105	170	340	113	220	222	425

NB. Ulteriori dimensioni a richiesta - *Other dimensions on request.*